



VRLA Rechargeable Battery

EP80-12 (EP80-12FR)



FEATURES

- Absorbent Glass Mat technology for efficient gas recombination
- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for heavy duty cyclic application
- Flame-arrestor is installed to ensure safety
- Low self-discharge rate, lower than 3% capacity loss per month

APPLICATION

- UPS
- EV
- Telecom
- Golf-Carts



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	80Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	31.2Kg(68.8lbs.)
Terminals	B3 (Fitting M6 bolt & nut) I2 is optional
Internal Resistance	≤5.0mΩ (Fully Charged)
Max. Discharge Current	800 A (5 sec.)
Max. Charge Current	24 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> ● IEC 60896-21/22 ● JIS C 8704-2 ● GB/T 19638.2 	

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
329±2.0 (12.95±0.08)
- **Width**
172±2.0 (6.77±0.08)
- **Container Height**
215±2.0 (8.46±0.08)
- **Total Height**
B3:238±2.0 (9.37±0.08)
I2:218.5±2.0(8.60±0.08)

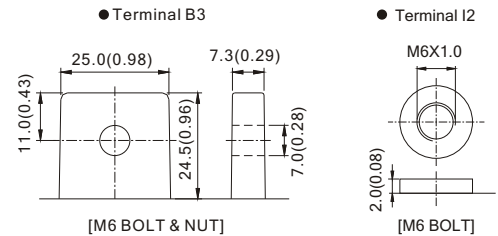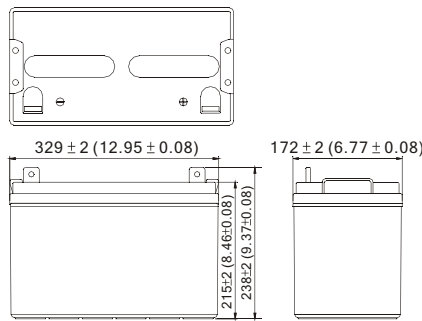

Terminal Hardware Initial Torque: B3,I2(5.5Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell)	Discharge Time	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		1586	1015	553	233	161	89.8	47.0
1.75V		1661	1054	569	238	163	91.2	48.0
1.70V		1711	1078	579	240	165	91.7	48.2
1.65V		1751	1093	587	242	166	91.9	48.3
1.60V		1785	1104	593	243	166	91.9	48.3

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell)	Discharge Time	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		143	89.8	46.5	19.4	13.4	7.49	3.91
1.75V		151	93.3	47.8	19.8	13.6	7.60	4.00
1.70V		156	95.4	48.7	20.0	13.7	7.64	4.02
1.65V		159	96.7	49.4	20.2	13.8	7.66	4.03
1.60V		162	97.7	49.8	20.3	13.8	7.66	4.03

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.