



VRLA Rechargeable Battery

BPL7-12



FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Low self-discharge rate
- Can be used in any orientation(excluding used inverted)
- Absorbent Glass Mat technology for efficient gas recombination


APPLICATIONS

- UPS
- Laboratory Equipment
- Toy-Cars
- Power Packs
- Fishing Lights




SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	7.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	2600g(5.73lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	≤25m Ω (Fully Charged)
Max. Discharge Current	105 A (5 sec.)
Max. Charge Current	2.1 A
Operating Temperature Range	Charge: 0°C~40°C(32°F~104°F) Discharge: -20°C~50°C(-4°F~122°F) Storage: -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL94 HB) BPL7-12 Optional: Flame Retardant ABS(UL94 V-0) BPL7-12FR



MH19884



C4M20310-2474-E-16

- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

151±1.5 (5.94±0.06)

Width


65±1.5 (2.56±0.06)

Container Height


93±1.5 (3.66±0.06)

Total Height


98±2.0 (3.86±0.08)

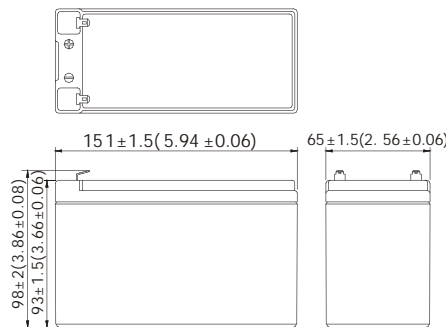

Terminal T1



Terminal T2



Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		228.0	171.4	138.8	83.50	48.40	20.40	14.10	7.86	4.11
1.75V		264.0	185.7	145.3	86.70	49.80	20.80	14.30	7.98	4.20
1.70V		280.0	192.4	149.7	88.60	50.70	21.00	14.40	8.02	4.22
1.65V		293.0	197.0	153.2	89.90	51.40	21.20	14.50	8.04	4.23
1.60V		302.0	200.9	156.2	90.80	51.90	21.30	14.50	8.04	4.23

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		20.54	15.09	12.07	7.076	4.067	1.700	1.175	0.655	0.343
1.75V		24.22	16.35	12.63	7.347	4.185	1.733	1.192	0.665	0.350
1.70V		25.69	16.94	13.02	7.508	4.261	1.750	1.200	0.668	0.352
1.65V		26.88	17.34	13.32	7.619	4.319	1.767	1.208	0.670	0.353
1.60V		27.71	17.68	13.58	7.695	4.361	1.775	1.208	0.670	0.353

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

For operation, please refer to the instruction from technical manual.

B/2 REV. May. 2021

Powered by **B.B. Tech(Changsha)Co., Ltd.**