



## VRLA Rechargeable Battery

# BPL33-12 Standard Type

### FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Low self-discharge rate
- Can be used in any orientation(excluding used inverted)
- Long life expectancy 15 years in float application
- Absorbent Glass Mat technology for efficient gas recombination

### APPLICATION

- UPS
- Wheelchairs
- Lawn Mowers
- Electronic Medical Equipment
- Golf-Carts

### SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (1.65A, 10.5V)	33.0 Ah
	10 Hour Rate (3.14A, 10.5V)	31.4 Ah
	5 Hour Rate (5.61A, 10.5V)	28.1 Ah
	30 Min Rate (33.0A, 7.8V)	16.5 Ah
Approx. Weight	11.5Kg(25.36lbs.)	
Terminals	B7 (Fitting M6 bolt & nut)	
Max. Discharge Current	495 A (5 sec.)	
Max. Charge Current	9.9 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤9.0mΩ (Fully Charged )	



### CONTAINER MATERIAL


- Standard: ABS( UL 94-HB)  
Model Name: BPL33-12
- Optional: Flame Retardant ABS (UL 94-V0)  
Model Name: BPL33-12FR



- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1


### OUTER DIMENSIONS mm(inch)

Length (L)	Width (W)	Container Height (H)	Total Height (TH)
195±1.5(7.68±0.06)	129±1.5(5.08±0.06)	155±1.5(6.10±0.06)	179±2.0(7.05±0.08)

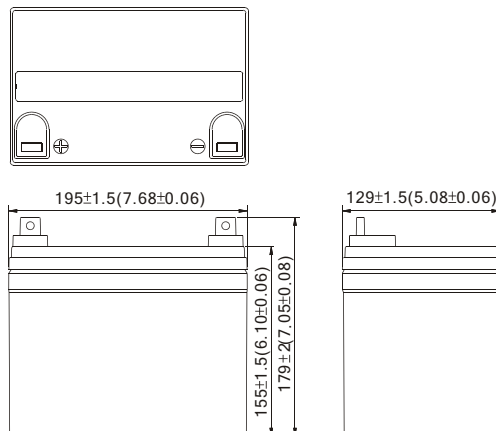

### TERMINAL TYPE


- Terminal B7

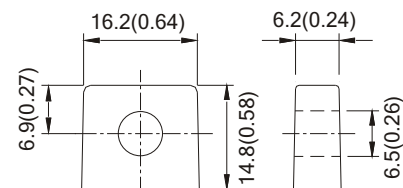


[M6 BOLT & NUT]

Terminal Hardware Initial Torque: B7 (5.5Nm±5%)

**BPL33-12 (BPL33-12FR) discharge characteristics (25°C /77°F)**

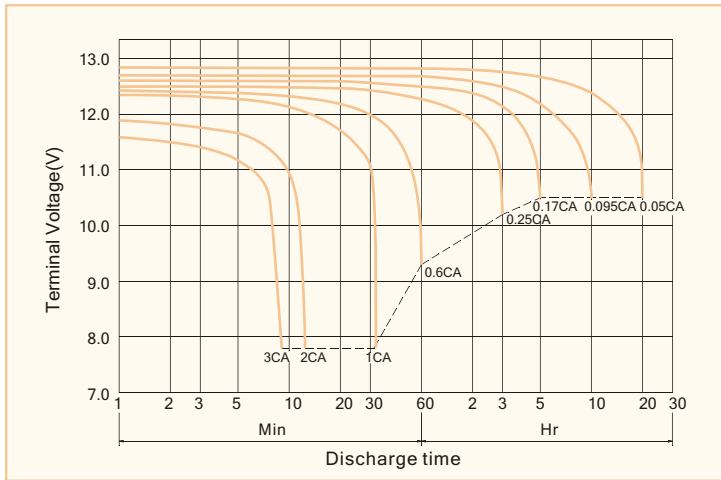


**Battery Charging Characteristics**

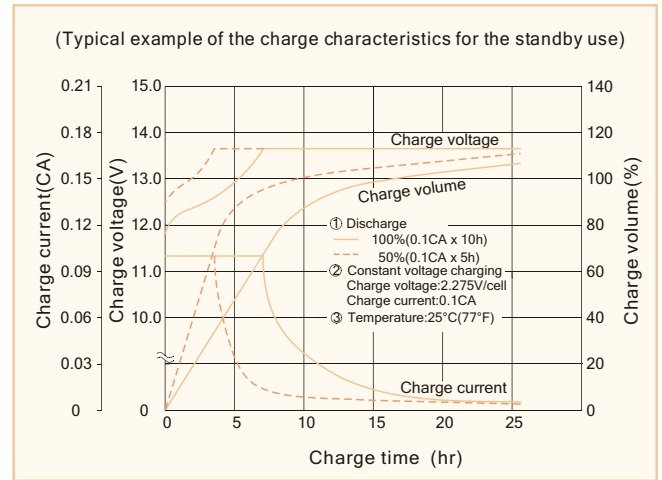

**Charging Procedure**

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C /cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

**Effect Of Temperature On Long Term Float Life**

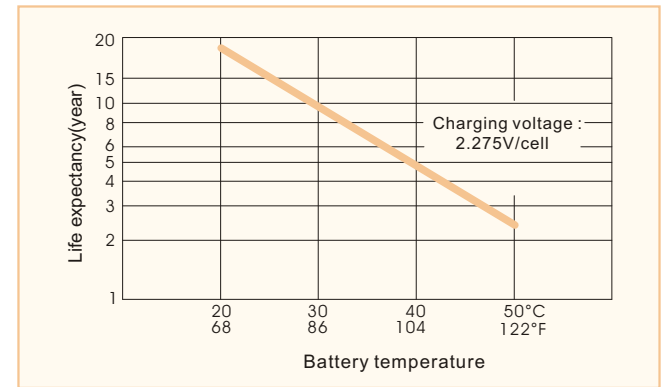

**Constant power discharge characteristics at 25 °C/77 °F Unit: W**

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	1075.0	808.0	654.3	393.6	228.2	96.2	66.50	37.05	19.38
1.75V	1245.0	875.4	685.0	408.7	234.8	98.1	67.40	37.62	19.80
1.70V	1320.0	907.0	705.7	417.7	239.0	99.0	67.90	37.81	19.89
1.65V	1381.0	928.7	722.2	423.8	242.3	99.9	68.40	37.90	19.94
1.60V	1424.0	947.1	736.4	428.1	244.7	100.4	68.40	37.90	19.94

**Constant current discharge characteristics at 25 °C/77 °F Unit: A**

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	96.8	71.1	56.9	33.4	19.2	8.02	5.54	3.09	1.62
1.75V	114.2	77.1	59.6	34.6	19.7	8.18	5.62	3.14	1.65
1.70V	121.1	79.8	61.4	35.4	20.1	8.25	5.66	3.15	1.66
1.65V	126.7	81.8	62.8	35.9	20.4	8.33	5.70	3.16	1.66
1.60V	130.6	83.4	64.0	36.3	20.6	8.37	5.70	3.16	1.66

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

SC(for Sader) A/0 REV. Dec. 2013

<p><b>USA:</b> B&amp;B BATTERY(USA) INC. 6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A. TEL:1-323-278-1900.1-800-278-8599 FAX:1-323-278-1268 E-Mail:sales@bb-battery.com</p> <p><b>CHINA FACTORY:</b> B.B. BATTERY CO., LTD. CHENG DONG TRIAL AREA,HUANG GANG, RAOPING, GUANG DONG,CHINA,515700 TEL:86-768-7601001-2 FAX:86-768-7601469 E-Mail:maggy@bb-battery.com</p>	<p><b>EUROPE:</b> B&amp;B BATTERY(EUROPE) B.V. SUITE 8, HAAKSBERGWEG 33, 1101 BP AMSTERDAM, THE NETHERLANDS TEL: 31-30-320-0190 MOBILE: 852-9128-2711 E-Mail: dliu@bb-battery.com</p> <p><b>HONG KONG:</b> B&amp;B BATTERY(Hong Kong) Co. TEL:852-2311-4918 FAX:852-2739-1182 E-Mail:bbhk@hkstar.com</p>	<p><b>JAPAN:</b> B&amp;B BATTERY(JAPAN) CO., LTD. 1375-11 NARAHARA-MACHI,HACHIOJI, TOKYO 193-0803,JAPAN. TEL:81-426-25-6375 FAX:81-426-25-6375 E-Mail:miyata@bb-battery.com</p> <p><b>TAIWAN:</b> B.B. BATTERY(TAIWAN) CO., LTD. TEL:886-6-502-5150 FAX:886-6-589-8087 E-Mail:kevinlin@bb-battery.com</p>
---	--	---