




## VRLA Rechargeable Battery

# MPL135-12

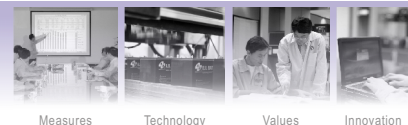

### FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed with very lower resistance and exceeding high power performance.
- Long life expectancy 10 years in float application
- Flame-arrestor is installed to ensure safety
- Absorbent Glass Mat technology for efficient gas recombination


### APPLICATIONS

- UPS
- Telecom
- Golf-Carts
- Cable TV
- Power station
- Marine




### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	130.0Ah @ 10 hour rate F.V.(1.75V/cell)
Approx. Weight	41.1Kg(90.6lbs.)
Terminals	I3
Internal Resistance	≤2.9mΩ (Fully Charged )
Max. Charge Current	39.0 A
Short Circuit Current	3500 A
Operating Temperature Range	Charge : 0°C~50°C(32°F~122°F) Discharge : -20°C~60°C(-4°F~140°F) Storage. : -20°C~50°C(-4°F~122°F)
Container Material	Standard: ABS( UL94 HB) MPL135-12 Optional: Flame Retardant ABS (UL94 V-0)MPL135-12FR



MH19884





- IEC60896-21/22
- JIS C 8704-2
- GB/T 19638.2

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
344±2.0 (13.54±0.08)
- **Width**  
173±2.0 (6.81±0.08)
- **Container Height**  
270.5±2.0 (10.65±0.08)
- **Total Height**  
277±2.0 (10.91±0.08)

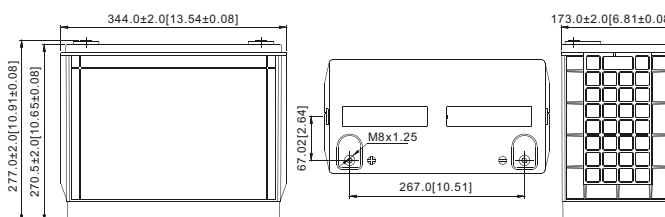

Terminal Hardware Initial Torque:  
I3(10.0Nm±5%)

### Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	20 Min	25 Min	30 Min	40 Min	50 Min	60 Min	90 Min
1.80V		4134	3467	2855	2387	2069	1817	1463	1227	1063.5	756.0
1.75V		4525	3681	3020	2480	2130	1863	1493	1253	1080.0	768.0
1.70V		4888	3832	3123	2544	2172	1893	1514	1268	1092.0	777.0
1.65V		5220	3950	3194	2592	2207	1914	1532	1281	1102.5	783.0
1.60V		5357	4027	3240	2627	2234	1932	1547	1292	1111.5	787.5

### Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	20 Min	25 Min	30 Min	40 Min	50 Min	60 Min	90 Min
1.80V		374	305	248	204	174	152	122	102	89.4	63.5
1.75V		412	327	261	213	182	158	125	105	90.8	64.5
1.70V		449	349	270	219	186	161	128	107	91.8	65.3
1.65V		492	369	278	224	189	164	129	108	92.7	65.9
1.60V		521	388	282	227	192	165	131	110	93.3	66.3

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.