



Measures Technology Values Innovation



VRLA Rechargeable Battery

HR9-12

FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for high rate usage
- Its design life is up to 6 years in floating application
- Absorbent Glass Mat technology for efficient gas recombination
- The power density at 5 min~15min discharging rate is 30% higher than BP series

APPLICATIONS

- UPS
- Laboratory Equipment
- Fishing Lights
- Fishing Lights Booster
- Power Packs
- Toy-Cars

SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (0.45A, 10.5V)	9.0 Ah
	10 Hour Rate (800mA, 10.5V)	8.0 Ah
	15 Min Rate (216W, 7.8V)	4.5 Ah
Approx. Weight	2750g(6.06lbs.)	
Terminals	T2 (Faston Tab 250) , T1 and B0 are optional	
Max. Discharge Current	120 A (5 sec.)	
Max. Charge Current	2.4 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤15m Ω (Fully Charged)	



CONTAINER MATERIAL

- Standard: ABS(UL94 HB)
Model Name: HR9-12
- Optional: Flame Retardant ABS (UL94 V-0)
Model Name: HR9-12FR

Certificate as below:




Compliance of the standards as below:


- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

OUTER DIMENSIONS mm(inch)


Length (L)	Width (W)	Container Height (H)	Total Height (TH)
151±1.5(5.94±0.06)	65±1.5(2.56±0.06)	94±1.5(3.70±0.06)	100±2.0(3.94±0.08)

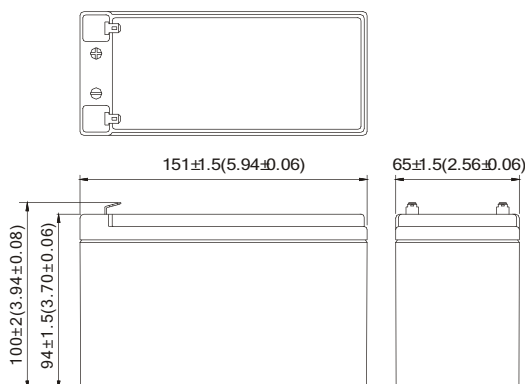


TERMINAL TYPE

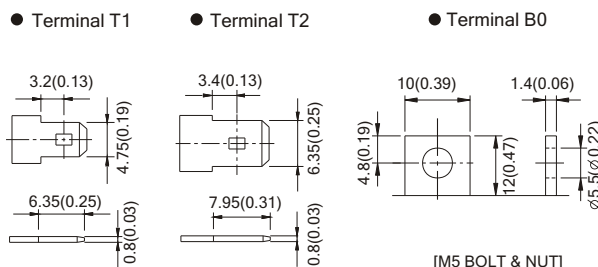

HR9-12 (HR9-12FR) discharge characteristics (25°C/77°F)

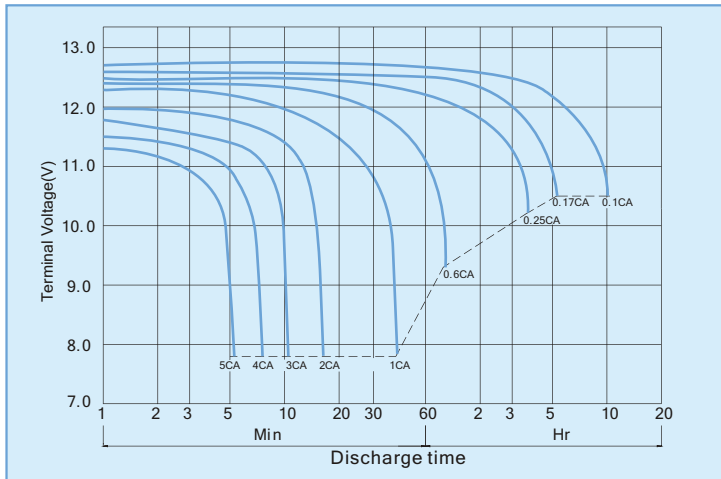


Battery Charging Characteristics

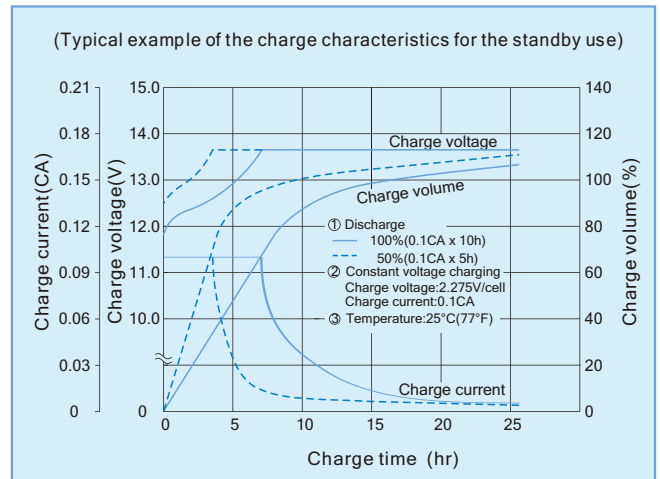

Charging Procedure

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

Effect Of Temperature On Long Term Float Life

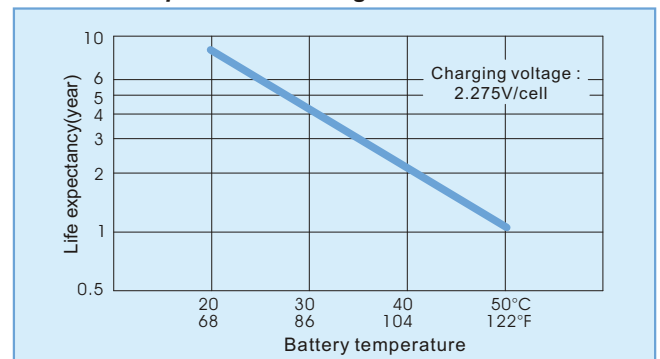

Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	369.0	252.0	182.5	155.7	118.4	90.0	75.2	66.2	36.5
1.70V	441.0	281.3	198.5	164.9	123.3	93.4	77.6	67.7	37.2
1.65V	465.9	291.6	204.5	168.5	124.6	94.3	78.3	68.1	37.4
1.60V	472.5	295.9	207.5	171.0	126.0	95.6	79.2	68.9	37.8
1.50V	486.0	301.5	212.0	173.7	127.6	96.8	80.1	69.5	38.0
1.40V	495.0	305.6	214.4	175.3	128.5	97.4	80.8	70.0	38.1
1.30V	499.5	308.3	216.0	176.4	129.2	97.9	81.2	70.2	38.2

Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	32.95	22.11	15.79	13.35	10.03	7.57	6.29	5.52	3.04
1.70V	40.09	24.68	17.17	14.14	10.45	7.86	6.49	5.64	3.10
1.65V	42.40	25.60	17.70	14.50	10.56	7.93	6.55	5.68	3.12
1.60V	42.95	25.96	17.95	14.67	10.68	8.04	6.63	5.74	3.15
1.50V	44.18	26.45	18.34	14.90	10.81	8.14	6.70	5.79	3.17
1.40V	45.00	26.81	18.55	15.03	10.89	8.19	6.76	5.83	3.18
1.30V	45.41	27.04	18.69	15.13	10.95	8.23	6.79	5.85	3.18

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.

A/0 REV. Nov. 2024

USA:
B&B BATTERY(USA) INC.
6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.
TEL:1-323-278-1900.1-800-278-8599
FAX:1-323-278-1268
E-Mail:sales@bb-battery.com

CHINA FACTORY:
B.B. TECH(CHANGSHA) CO., LTD.
No.57 DongsirRoad, Changsha National Economic & Technical Development Zone, Changsha, Hunan PRC
TEL:86-731-82955888
FAX:86-731-82955111
E-Mail:maggy@bb-battery.com

EUROPE:
B&B BATTERY(EUROPE) B.V.
SUITE 8, HAAKSBERGWEG 33, 1101
BP AMSTERDAM, THE NETHERLANDS
TEL: 31-30-320-0190
MOBILE: 852-9128-2711
E-Mail: dliu@bb-battery.com

HONG KONG:
B&B BATTERY(Hong Kong) Co.
TEL:852-2311-4918
FAX:852-2739-1182
E-Mail:bbhk@hkstar.com

JAPAN:
B&B BATTERY(JAPAN) CO., LTD.
1375-11 NARAHARA-MACHI,HACHIOJI,
TOKYO 193-0803,JAPAN.
TEL:81-426-25-6375
FAX:81-426-25-6375
E-Mail:miyata@bb-battery.com

TAIWAN:
B.B. BATTERY(TAIWAN) CO., LTD.
TEL:886-6-502-5150
FAX:886-6-589-8087
E-Mail:kevinlin@bb-battery.com